


Light Weight series



LIGHT OUTPUT

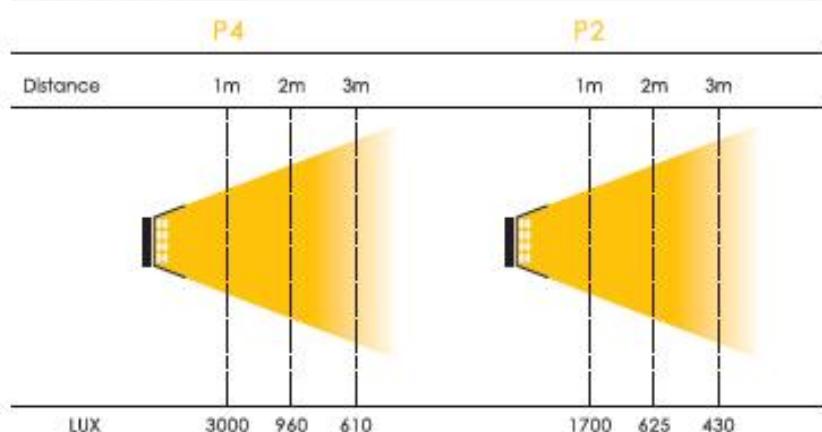

*Fixed by mounting plate type.

TECHNICAL DATA

	WATTAGE	TUBES	DIMENSIONS(cm)	WEIGHTS(kgs)
P4	220W	55W x 4	35x60x9.5	4.63
P2	110W	55W x 2	19x60x9.5	3.4

*AC INPUT VOLTA GE: Full series can choose 100V-120V/200V-240V/100V-240V

Single Line series




TECHNICAL DATA

	WATTAGE	TUBES	DIMENSIONS(cm)	WEIGHTS(kgs)
S5508	440W	55W x 8	71.6x58x10.7	9.66
S5506	330W	55W x 6	54.4x58x10.7	8.91
S5504	220W	55W x 4	37x58x10.7	6.75
S5502	110W	55W x 2	20.4x58x10.7	3.99


*AC INPUT VOLTA GE: Full series can choose 100V-120V/200V-240V/100V-240V

LIGHT OUTPUT

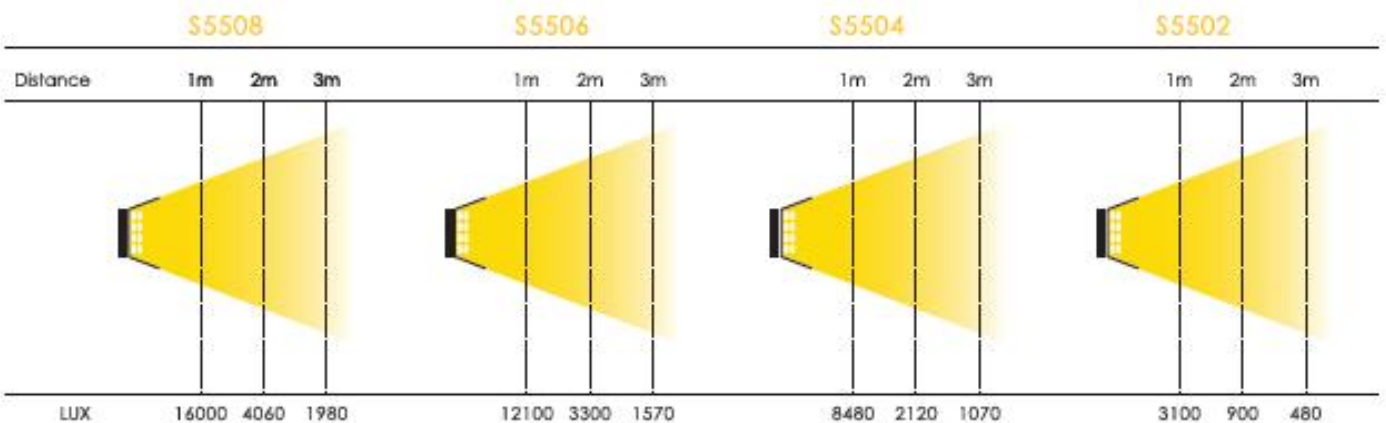

Double Line series



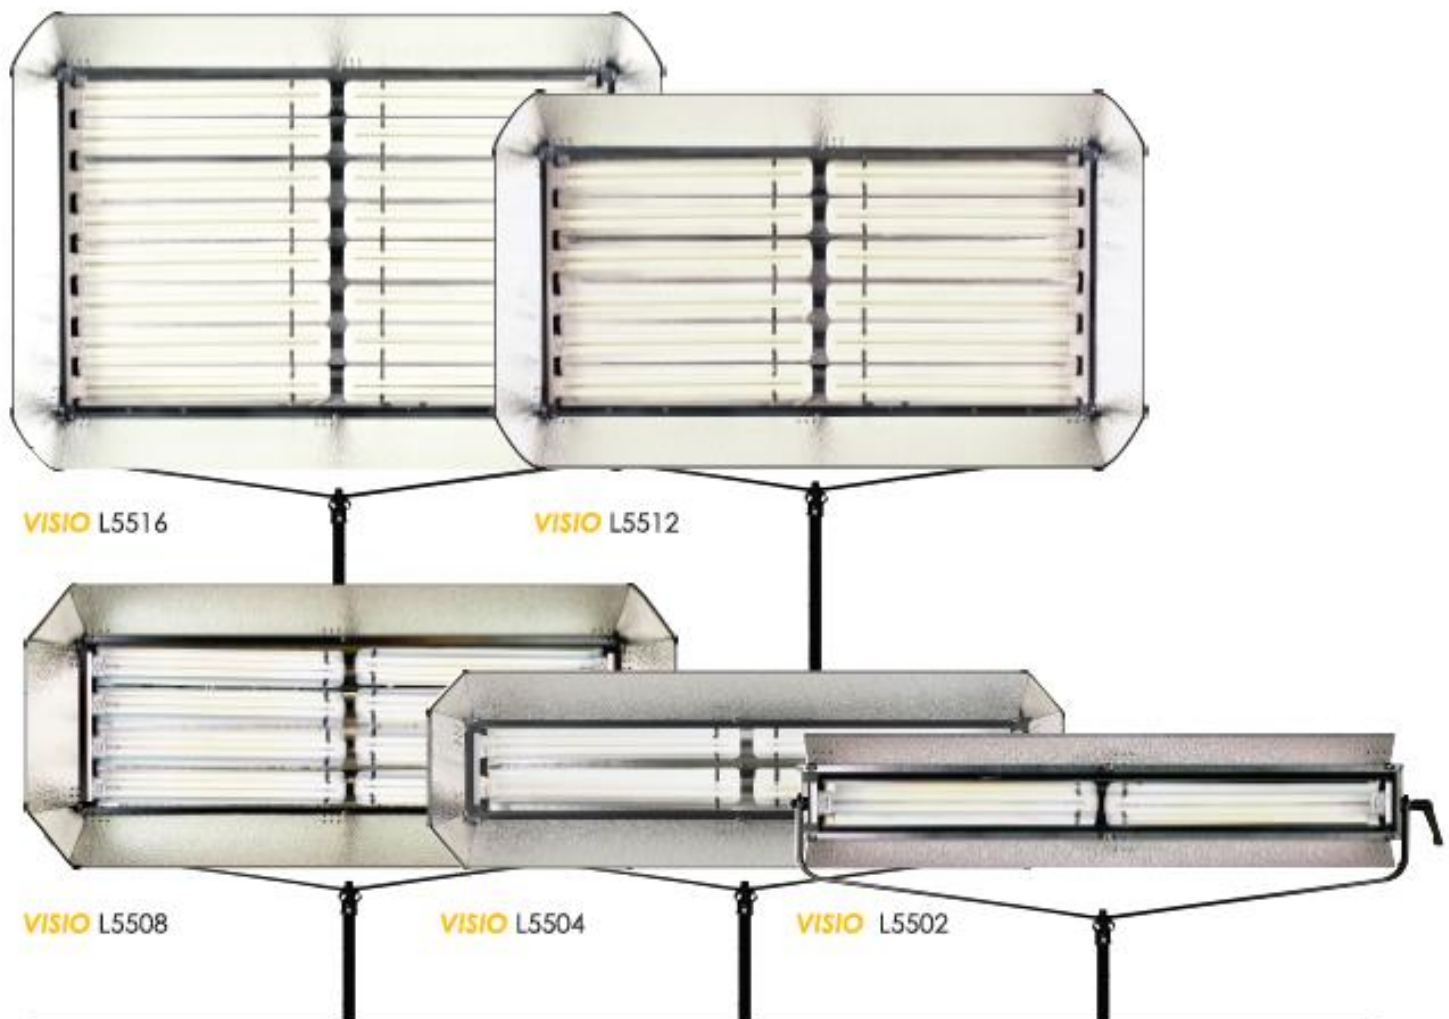


TECHNICAL DATA


	WATTAGE	TUBES	DIMENSIONS(cm)	WEIGHTS(kgs)
L5516	880W	55W x 16	71.6x113.3x10.7	19
L5512	660W	55W x 12	54.4x113.3x10.7	14.80
L5508	440W	55W x 8	37x113.3x10.7	10.54
L5504	220W	55W x 4	20.4x113.3x10.7	7.31
L5502	110W	55W x 2	13.6x113.3x10.7	6

*AC INPUT VOLTA GE: Full series can choose 100V-120V/200V-240V/100V-240V

LIGHT OUTPUT

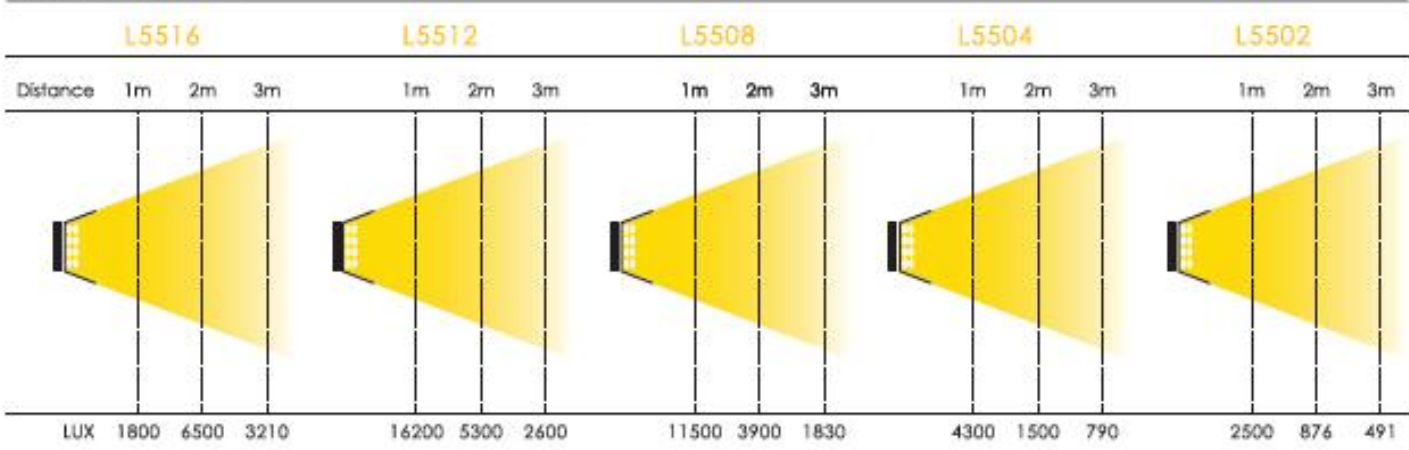

Accessories

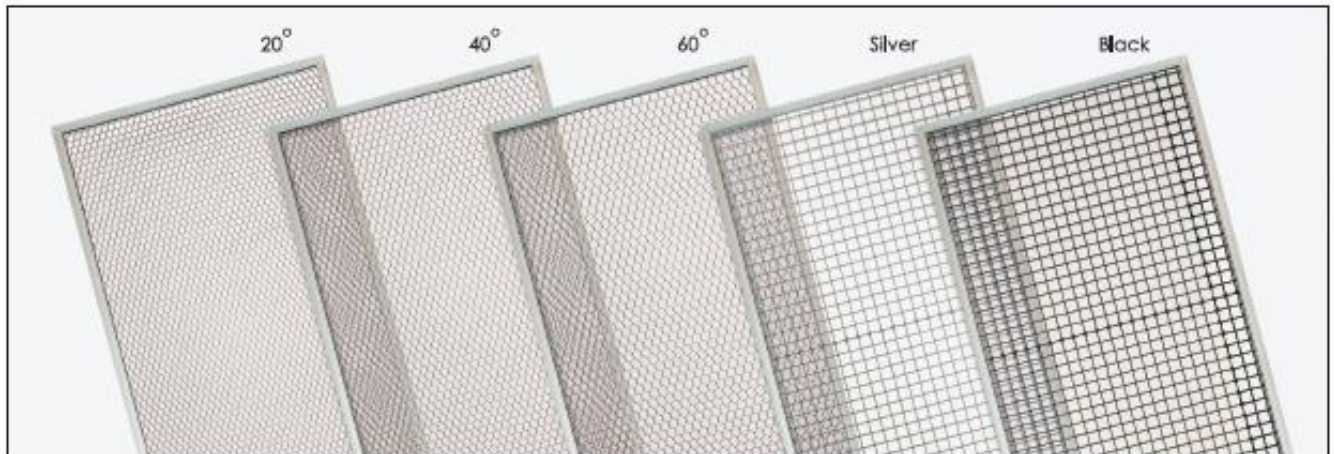

Honeycomb Grid:

It's made by aluminum, lights spill through the honeycomb grid to make objects modeling by gradational lights. Optional density of mesh includes 20°, 40° and 60°.

Egg Crate:

The egg crate is a plastic article that can narrow the spread of light, alters the shape and intensity of light from your light fixture, which is limited at 40° as the thickness of crate reduce more light.

Barndoor (for image fixtures)
Set of 4



Black

The black surface can absorb light beam and avoid the reflection from outside to control the brightness of required lighting area exactly.

Hammer

It's lumpy surface with multiple angles' reflection to make light beam softer. The reflectance is over 90%.

Specular

The glossy surface can create more reflectance to make lights brighter and stronger on required lighting area.

Gel Frame



Allow to alter lamp's temperature by attach different colored filter.


Fabric case (waterproof)



Features

- Low consumption, highly efficient output.
 - 330W consumption equivalent of 2,500W tungsten light.
 - Operational consumption at 1/10 of tungsten light.
 - Option of 3,200 K, 5,400 K or 5,600 K light tubes.
 - Almost no heat generated.
 - High frequency ensures flicker-free light.
-
- Multiple-level dimmer option.
 - Switch on/off.
 - Turning Knob: User can control light by manual.
 - Digital Dimmer: User can adjust the light by pressing button and the display panel will show the light intensity.
 - DMX 512 – It's connected with control console for DMX light channel linking system and control up to 512 channels.

- DMX Light Channel linking system

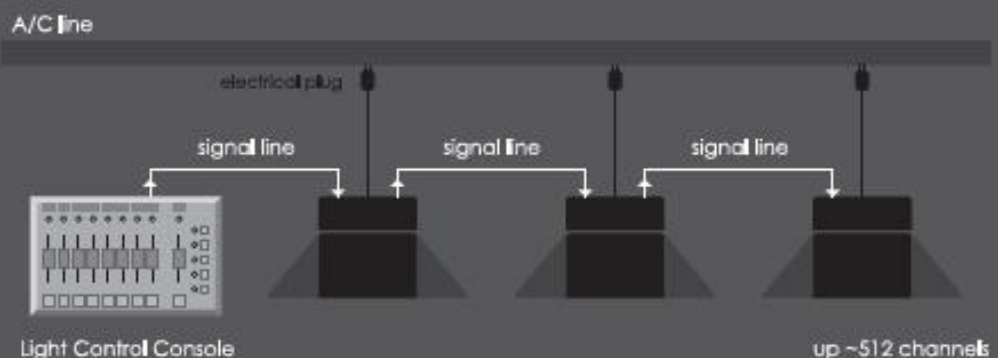

- Light-weight aluminum construction for optimal rigidity and durability.
- Fixed mode of Yoke type:
 - It's adjustable by slider-rail to meet the height of your studio.
- Fixed mode of Mounting plate type:
 - It's easy to operate for different dimensions.
- Create a soft, shadow-less lighting effect over a large area.
- No double shadow.